


# IMPACT-RATED INDOOR HOARDING

- No fixings required to anything
- No ground penetration
- Compliant to AS4687

## FREE-STANDING

Specifically engineered to free-stand to 8mH using a single 90 x 45 MPG standard stud – with no fixings required to anything

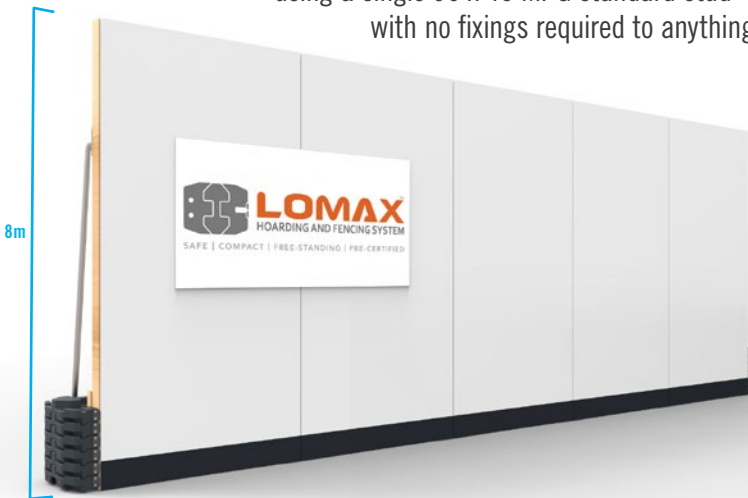

## IMPACT-RATED

Pre-certified and impact tested from both the front and rear of the hoarding for compliance to AS4687

**INDOOR HOARDING 'WEIGHT TO HEIGHT' GUIDE FOR COMPLIANCE TO AS4687**

SOLID PANEL HEIGHT – MAX (H)	STUD – 90 X 45 (4X2) MPG10	QUANTITY OF COUNTER-WEIGHTS @ 1.2MW INTERVALS	CEILING AND / OR SIDE BRACING REQUIREMENTS
1.2m	90 x 45 MPG10	2	Free-standing – Not Required
1.8m	90 x 45 MPG10	3	Free-standing – Not Required
2.4m	90 x 45 MPG10	3	Free-standing – Not Required
3m	90 x 45 MPG10	4	Free-standing – Not Required
3.6m	90 x 45 MPG10	4	Free-standing – Not Required
4m	90 x 45 MPG10	5	Free-standing – Not Required
4.6m	90 x 45 MPG10	5	Free-standing – Not Required
5m	90 x 45 MPG10	6	Free-standing – Not Required
5.6m	90 x 45 MPG10	6	Free-standing – Not Required
6m	90 x 45 MPG10	7	Free-standing – Not Required
7m	90 x 45 MPG10	8	Free-standing – Not Required
8m	90 x 45 MPG10	9	Free-standing – Not Required
Above 8m	90 x 45 MPG10	9	Required at Top of Hoarding

*Lower Cross-Brace and Support Post Required for all Certification – See LOMAX for Technical Guide / Build Process*



**For all enquiries, please contact:**

Lomax Hoarding and Fencing Systems  
1300 0 LOMAX  
1300 0 566 29

[lomaxhoarding.com](http://lomaxhoarding.com) [lomaxfencing.com](http://lomaxfencing.com)